

All Days | Safty | Reliable | Stability
















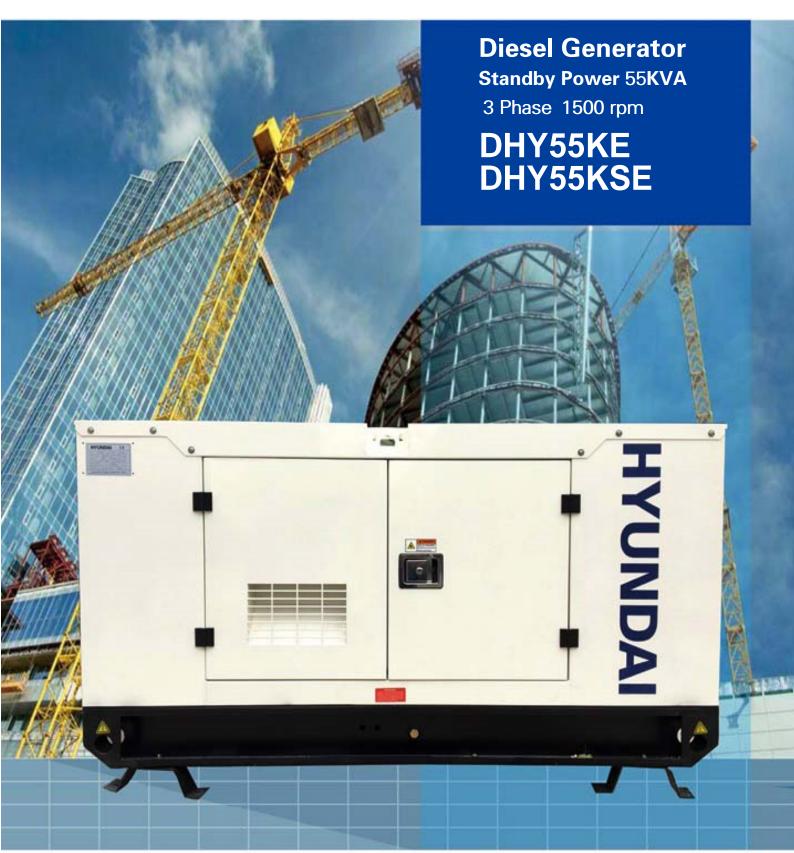

All Days | Safty | Reliable | Stability













TECHNICAL SPECIFICATION

DHY55KE OPEN TYPE / DHY55KSE CANOPY TYPE

50Hz Standby 55KVA

Benefits and Feature

- > Use best quality vehicle engine, low fuel consumption, running reliable
- > Use high quality and performance brushless alternator, with AVR
- > High quality controller of COMAP
- > Block design electrical control system, easy operate and maintenance
- > Standard 8 hours generator running base frame fuel tank (100% load)
- > With baseframe forklift hole and generator canopy lifting hole
- > Industrial waterproof canopy, ensure generator all days running
- > Industrial silencer (7 meters the noise is lower than 68 dB)
- > Easy operation , IP23 protection industrial sockets and plugs >

Four pole circuit breaker with RCD earth protection > Standard ATS function connector

Technical Specification		
Prime Power	KVA/ KW	50 / 40
Standby Power	KVA/ KW	55 / 44
Power Factor		0.8
Frequency	Hz	50
Rate Voltage	V	400/230
Rate Current	А	79.4
Controller		COMAP AMF20
Control Voltage	DC/V	24
Battery Capacity	Ah	60x2
Coolant Capacity	L	11.26
Fuel Tank Capacity(Base frame)	L	110
Fuel Consumption	L/hour	13.88
Running Time	Hour	8

Voltage

Steady state regulation	%	≤ ± 0.5
Dynamic voltage renewal	%	≤+20~-15
Stable time	Sec	2.0
Waveform distortion		≤ 3
Volatility		≤0.5
Frequency		
Steady state regulation	%	≤ ± 1
Dynamic frequency renewal	%	≤+10~-7
Stable time	Sec	≤ 3
Volatility		≤0.5
Environment require		
Temperature	С	≤40
Humidity	%	≤60
Altitude	m	≤1000
Standard		
ISO3046、ISO8528、ISO900	1-2008	

Dimension | Weight | Sound



DHY**5**5KE OPEN TYPE

Length		mm	1955
Width (W)	mm	950
Height (H)	mm	1240
Weight net	:	Kg	995
loading cap	acity (units/cont	ainer)	
Sound @7	meter	dB	92



DHY55KSE CANOPY TYPE

mm	2320
mm	910
mm	1400
Kg	1050
dB	68
	mm mm Kg

Note

- 1. Generator continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hours period
- 2. Every generator strictly test on 0% 25% 75% 100% 110% load dynamic responsiveness ability, and all protections



Powerful engine and reliable running quality Durable running performace and was proofed by vehicle's application

Compact structure

Compact structure and metal materials saving for low cost

Low maintenance and repair cost
Air,fuel and oil tubes are silicone and stainless steel materials, which reduce leakage problems substantially

Excellent start perfomance

Fuel injector and pump were tested fully in Various environments, which provide excellent start and running preformance

DIESEL ENGINE

Model		HY4DX22
Prime power	Kw	48
Structure		4 cylinder,inline
Fuel type		Diesel
Fuel consumption	L/Hour	13.88
Lubricant consumption	L/Hour	0.054
Governor		Electrical
Coolling		Water
Lubricant capacity		13
Air intake flow	m³/min	11.5
Exhaust gas flow	m³/min	13.4
Exhaust gas temperature	$^{\circ}$	460
Exhaust gas back pressure	KPa	6.7
Compression ratio		17
Aspiration		Turbocharged
Bore	mm	102
Stroke		118
Displacement	L	3.86
SAE		3/11.5
Dimension	mm	$870 \times 770 \times 680$
Net weight	Kg	350
*		

ALTERNATOR

Model		224G40
Prime power	kVA	50
Structure		1bearing
Excitation mode		Self-excitation
Insulation class	NAME OF STREET	H
Protection class		IP23
TIF	1	<50
THE	and a	<2%
Air flow	m³/s	0.216
AVR Model		SX460



Best structure

Excellent design ensures compact structure and perfect appearance

Excellent performance

Excitation enhanced system improves start and short circuit's protection performance

Less parts involved and the most market's demand lead to cheap price and fine quality

Easy maintenance and repair

Core parts won't be involved in repair job,AVR can be replaced easily, examining diode doesn't disassemble rotor.

CONTROL PANEL




Controller

Comap AMF20



Support engine and alterantor monitoring, measurement and protection. This is long—running and back—up unit to integrate the best way to controlo support Modbus standard, modem, RS485, USB and interneto

Control panel

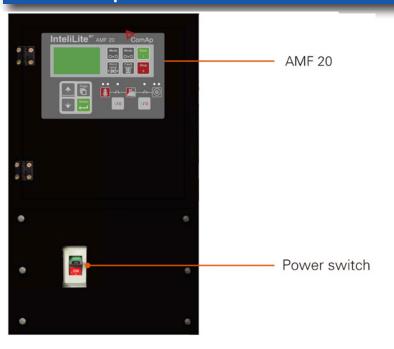

и	Genset prime power Kw	
	Power factor	•
ı	Engine speed	•
	Phase to neutral voltage	•
	Phase to phase voltage	•
	Genset frequency	•
	Genset current	•
L	Mains Phase to neutral voltage	0
	Mains Phase to phase voltage	0
	Mains frequency	0
	Engine oil pressure	•
	Engine water temperature	•
	Fuel level	•
	Battery voltage	•
	Genset power KVA	•
	Genset running time	•
	Genset output KWh	•
	History file	•
	Alarm, shutdown function	
	Low oil pressure warning, shutdown	•
	High water temperature warning, shutdown	•
	Engine over and under speed shutdown	•
	Low fuel level warning, shutdown	•
	Battery low and high voltage warning	•
	Battery chargering failure	•
	Genset low and high voltage warning, shut down	•
	Alternator 3 phase voltage unbalance shut down	•
	Alternator low and high frequency warning, shut down	•
	Genset over load shutdown	•
	Alternator3 phase current unbalance shutdown	•
	Mains low and high voltage warning	0
	Mains low and high frequency warning	0
	Optional	
	Remote start and stop	•
	RS232 card	Х
	USB card	•
	RS485 card	0
	Multi language display	0
	GPRS communication	0
	GPS communication	0

Measurement, displayment

AMF20











